

GEDA®

Suspended working platforms



GEDA®
ORIGINAL



▷ Innovations
▷ Know-how
▷ Up-to-date production technologies




GEDA®
ORIGINAL



Control

- ▷ pluggable control for 1, 2 or 3 motors
- ▷ including power outlet
- ▷ including automatic levelling with limit switch

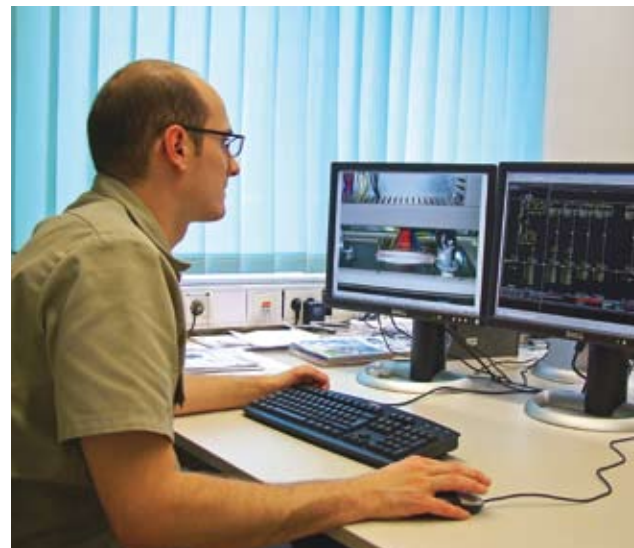

GEDA®

World-wide competence



Compact base unit with convenient supporting frame

- ▷ overspeed safety device
- ▷ rope breakage safety device



GEDA®
SUSPENDED
WORKING PLATFORM
AB 450

GEDA®
SUSPENDED
WORKING PLATFORM
AB 650

Your dealer:

GEDA®
ORIGINAL


GEDA-Dechentreiter GmbH & Co. KG
Mertinger Straße 60
D-86663 Asbach-Bäumenheim
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
vertrieb@geda.de
www.geda.de





Suspended working platforms – the inexpensive scaffold alternative for all construction sites.

► **Winch position**

Lateral suspension:

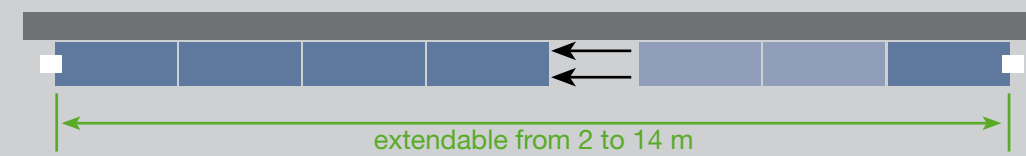

C-bracket + winch

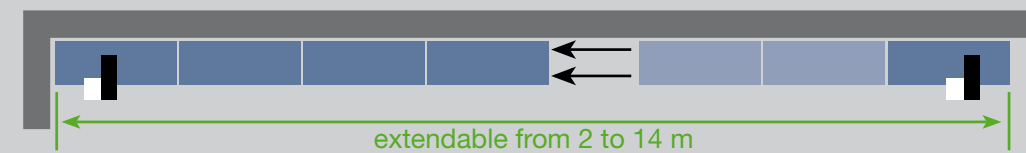


► **Roof boom**



► **Advantages**

- Work at facades and walls irrespective of the building height
- Adjust your working height for ergonomically best working position
- Modular aluminium platform system (segment length 1m/2m/3m)
- pluggable, hot-dip galvanised roof boom modules

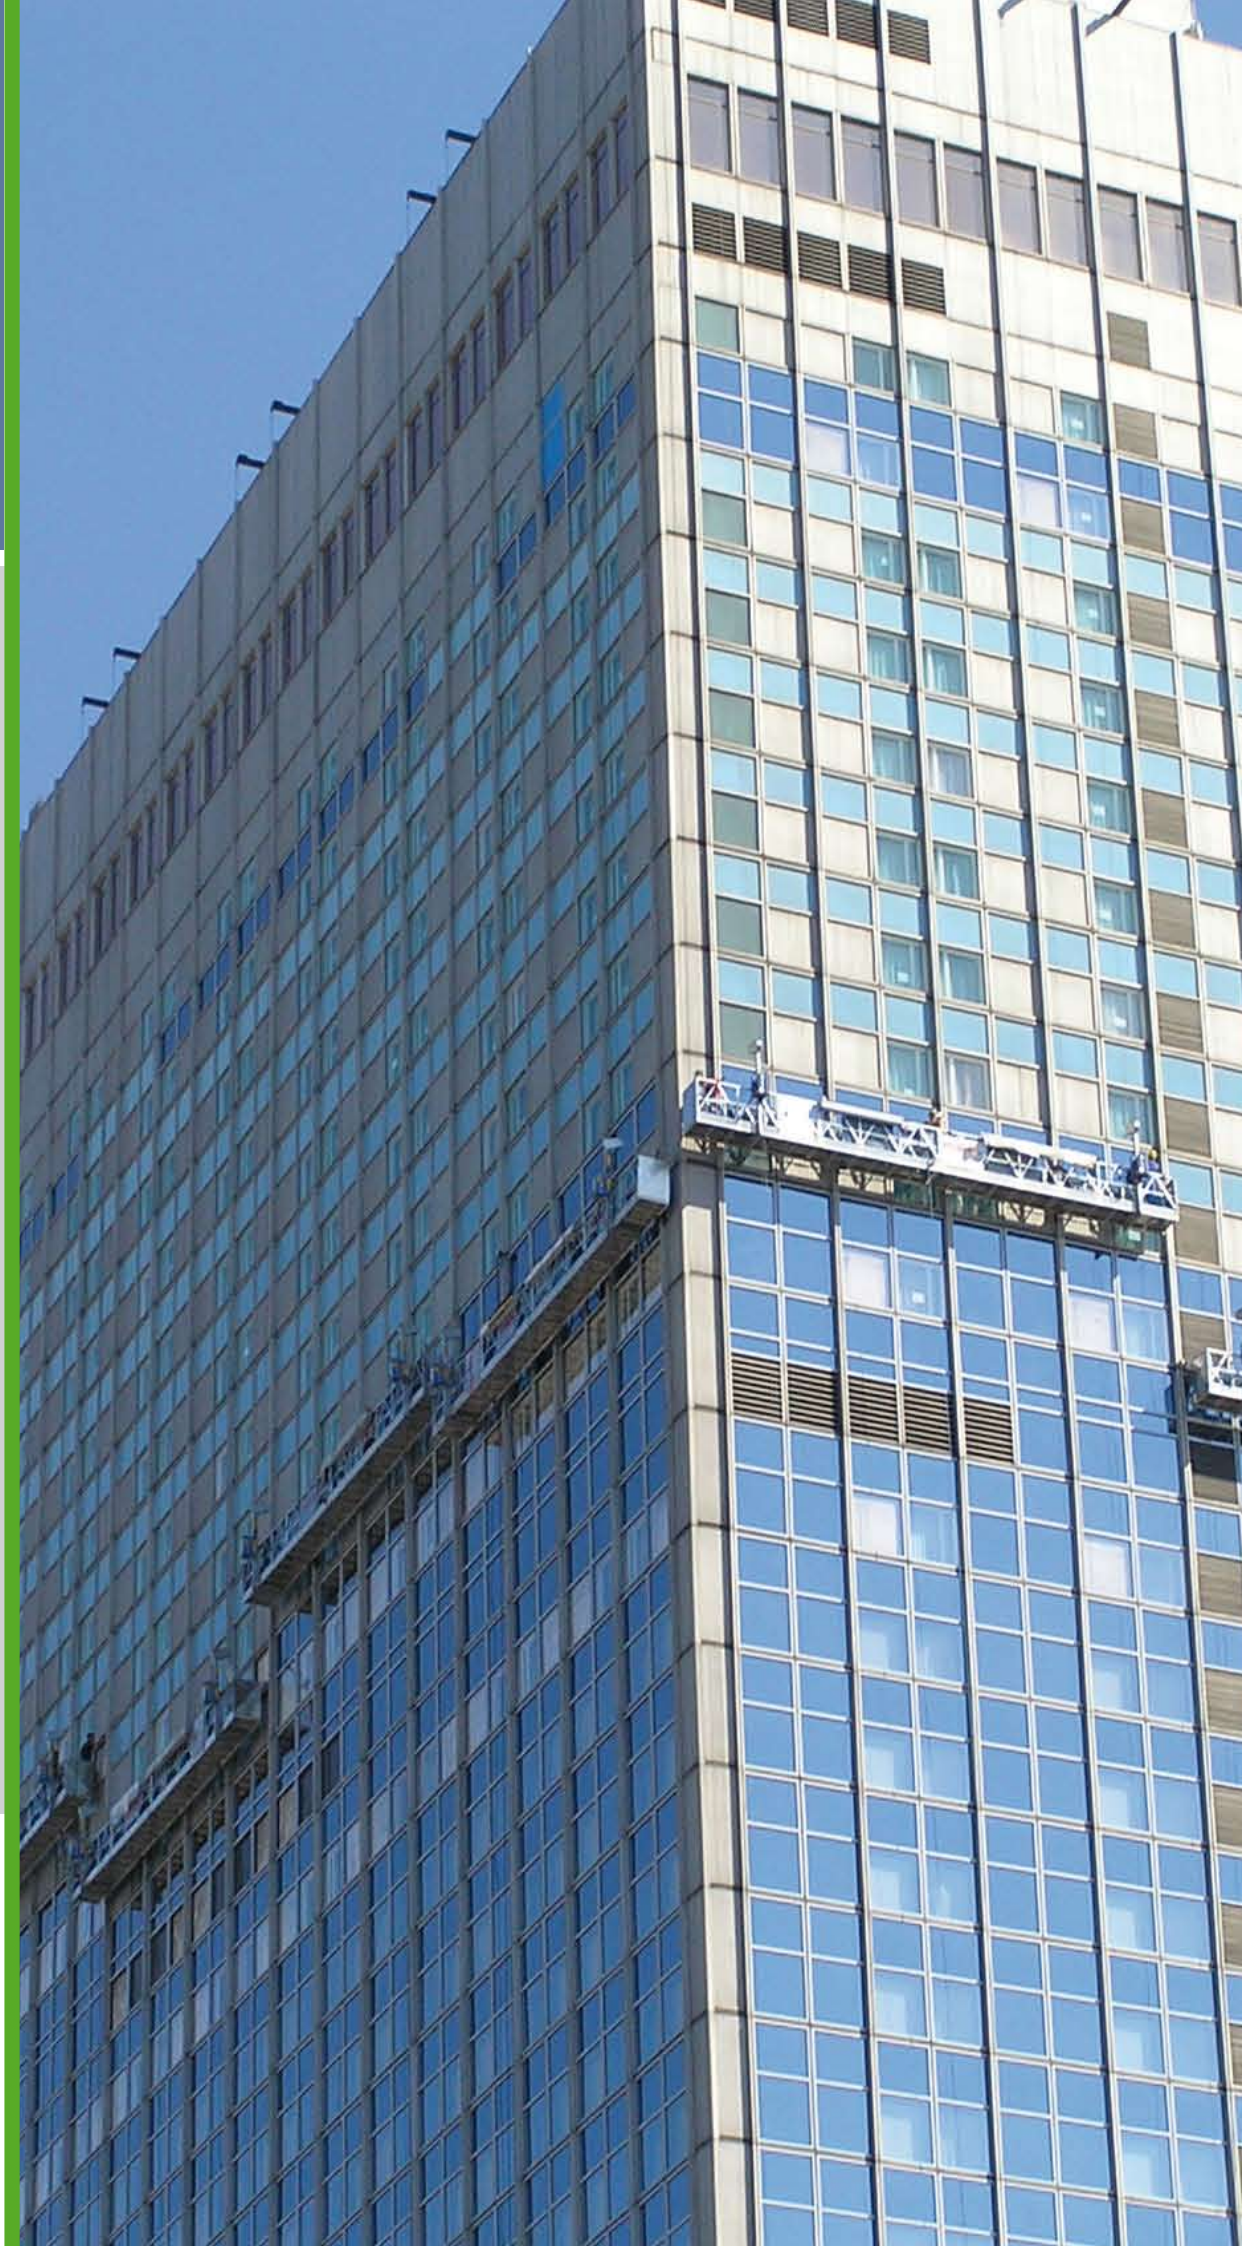

► **Technical data winch**

GEDA AB 450		GEDA AB 450		GEDA AB 650	
Platform length	1 - 14 m	Platform length	1 - 14 m	Platform length	1 - 14 m
Traction force	450 kp	Traction force	450 kp	Traction force	650 kp
Lifting speed	8 m/min.	Lifting speed	8 m/min.	Lifting speed	8 m/min.
Power supply	230 V/50 Hz	Power supply	400 V/50 Hz	Power supply	400 V/50 Hz
Control voltage	48 VAC	Control voltage	48 VAC	Control voltage	48 VAC



Special applications on request!

